

# KOOK 60


## Wood Insertion Cookers

# CADEL

Certificate model name : KOOK60 4.0



Nominal power	kW	6,2
Reduced power	kW	-
Introduced thermal power (max)	kW	7,4
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	74
Nominal efficiency	%	84,1
Reduced efficiency	%	-
Heating volume (min-max)	m³	177
Nominal CO at 13% O <sub>2</sub>	%	0,097
Reduced CO at 13% O <sub>2</sub>	%	-
Emissions CO (13% O <sub>2</sub> ) (min-max)	mg/Nm³	1209
Emissions OGC (13% O <sub>2</sub> ) (min-max)	mg/Nm³	69
Emissions NOX (13% O <sub>2</sub> ) (min-max)	mg/Nm³	78
Dust content at 13% O <sub>2</sub> (min- max)	mg/Nm³	29,8
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	-
Combustible		<b>Legna</b>
Hourly consumption (min-max)	kg/h	1,7
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	-
Supply and frequency	V - Hz	-
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	7,3
Exhaust fumes temperature (max)	°C	168
Net weight	kg	121,6
Gross weight	kg	135,8
Exhaust fumes (A)	Ø mm	140
Hole combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

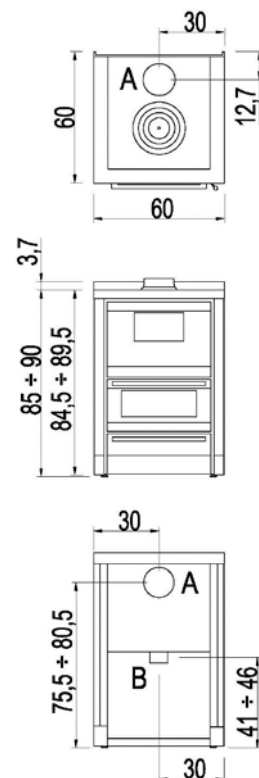

### MATCH

71220009	Stainless steel	EAN 8053859016298
71220010	Anthracite steel	EAN 8053859016304
71220012	Black steel	EAN 8053859016328

### OPTIONAL

5018015	Top	EAN 8053859012863
5021005	Raccordo 140/150 mm	EAN 8053859014256

### PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air



OPTIONAL Ventilation + light kit




View on the oven



Built - in

### STOVE PACKING




L (cm)	H (cm)	P (cm)
79	103.1	80

VOLUME (m³)


0.65

### LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	60	13,5	80


### STOCKING



Nr (max)

2

### TRANSPORT



51 pcs