

SMART 60


Wood Insertion Cookers / Free standing

CADEL

Certificate model name : SMART 60



Nominal power	kW	6,5
Reduced power	kW	-
Introduced thermal power (max)	kW	7,7
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	75
Nominal efficiency	%	85,1
Reduced efficiency	%	-
Heating volume (min-max)	m³	185
Nominal CO at 13% O ₂	%	0,085
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm³	1062
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	64
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	90
Dust content at 13% O ₂ (min- max)	mg/Nm³	21
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	1,8
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	-
Supply and frequency	V - Hz	-
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	6,3
Exhaust fumes temperature (max)	°C	185
Net weight	kg	123
Gross weight	kg	136
Exhaust fumes (A)	Ø mm	140
Hole combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

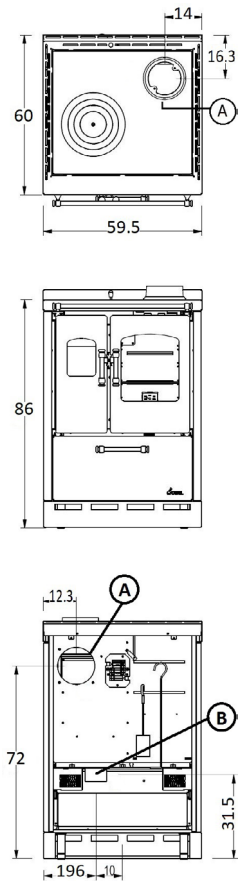

MATCH

71220026	■ Anthracite steel	EAN 8053859016472
71220027	■ White steel	EAN 8053859016489
71220028	■ Red steel	EAN 8053859016496

OPTIONAL

5020005	Feet	EAN 8053859012597
5020006	Podium inox	EAN 8053859012603
5020008	H4 upstand	EAN 8053859012627
5020009	H6 upstand	EAN 8053859012634
5020014	Top	EAN 8053859012689
5021005	140/150 mm connection	EAN 8053859014256

PLUS



Cooking

Built - in

Freestanding



Central Top and back exhaust



View on the oven



OPTIONAL Ventilation + light kit




Refractory stone inner with 2nd combustion air



Cast iron door

STOVE PACKING




L (cm)	H (cm)	P (cm)
79	103.1	80

VOLUME (m³)


0.65

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	60	13,5	80


STOCKING



Nr (max)

2

TRANSPORT



51 pcs